



GLC 4400

Multi-Purpose Controller for Automatic Lubrication Systems



Programmed lubrication cycles for optimal machine performance

- Customize your lubrication time, pressure, cycle counts and machine counts for maximum precision and productivity
- Simple icon- and menu-based user interface is easy to setup and operate, saving valuable technician time
- Special operation modes save setup and inspection time
- Rugged and weatherproof for long life and low cost operation
- Works with single line resistive, single line parallel, series progressive and dual line systems

PROVEN QUALITY. LEADING TECHNOLOGY.



Easily Manage Your Automatic Lubrication System

Loaded with features and simple to operate. A must-have controller for ensuring critical machine lubrication.

Streamlined—one controller does it all!

Match up and customize the inputs/outputs for maximum flexibility and functionality.

Inputs Include:

- Pressure/Cycle Switch
- Machine Count Switch
- Reservoir Level Indication Switch
- Remote Manual Run Switch


Outputs Include:

- Pump Control Signal
- Low Level Alarm Signal
- Pressure/Cycle Alarm Signal
- System OK Signal

Contact us today!

To receive product information or to speak with a Graco representative, call 800-533-9655 or visit us online at www.graco.com.

©2009 Graco Inc. 340391 Rev. A 05/09 All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.

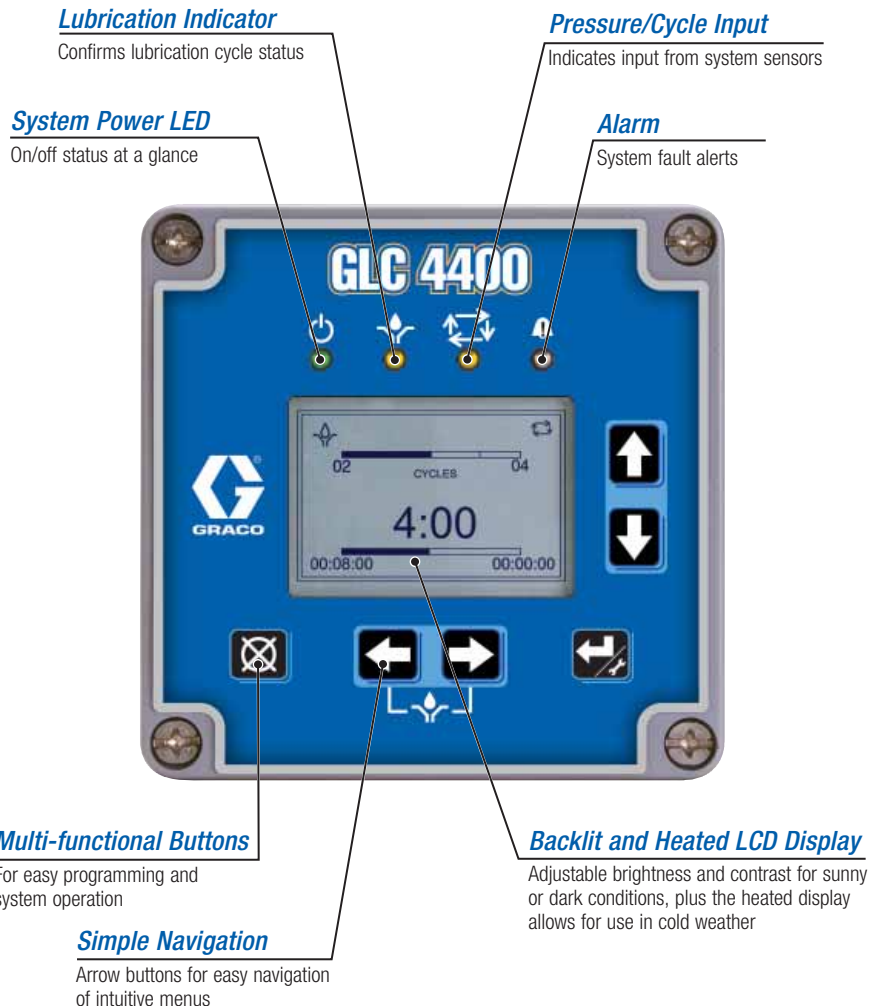

TECHNICAL SPECIFICATIONS

Height	4.7 in (120 mm)
Width	4.8 in (122 mm)
Depth	3.6 in (91 mm)
Protection Grade	IP 69K
Operating Temperature	-40° F to 145° F (-40° C to 63° C)
Net Weight	2 lbs (0.9 kg)
Standards	CE Marked and applicable automotive requirements
VDC Manual	313855
VAC Manual	313856

ORDERING INFORMATION

GLC 4400	VAC	VDC
Part Number	24B596	24B591
Input Voltage	100-240 VAC	9-30 VDC
Frequency	50/60 Hz	-