


# Classic Series



The RAD Classic Series torque wrenches offer a reliable and dependable solution for controlled bolting environments. A stall type tool with no impacting results in a smooth continuous application of torque eliminating destructive hammering and reducing operator strain resulting in increased productivity. All RAD Pneumatic Series tools are supplied with Reaction arm, 3M hose, tool holder, Filter/Regulator/Lubricator, Waterproof Site box and instruction manual as standard.

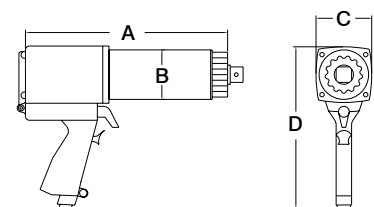

Part Number	Tool Model	Square Drive	Torque		Speed RPM	Weight Kg	Noise Level Dba	Dimensions (mm)			
			Ft.lbs	NM				A	B	C	D
12316	350SL	3/4"	50-350	70-475	65	2.7	80	167	60	69	222
12321	550SL	3/4"	100-550	135-750	35	2.9	80	185	60	69	222
12329	800NG	3/4"	150-800	200-1100	30	4.3	85	196	72	72	241
12338	1400NG	1"	300-1400	400-1900	15	5.6	85	228	76	83	241
12342	1800NG	1"	500-1800	700-2450	13	5.6	85	228	76	83	241
12345	2000	1"	500-2000	700-2700	13	5.6	85	228	76	83	241
12348	30	1"	1000-3000	1350-4100	14	9.2	85	335	78	93	264
12357	50	1 1/2"	1500-5000	2000-6800	8	12.7	85	335	101	93	264